





Product Specification

Outdoor P8



Product Picture of Outdoor P8 Series

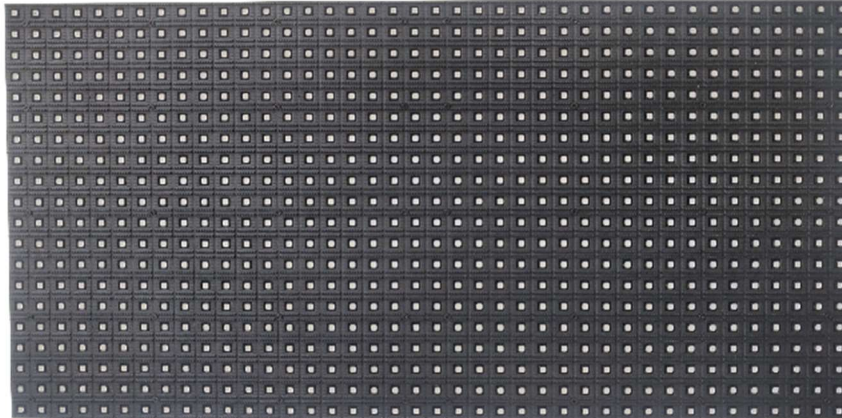

Hole Position of Outdoor P8 Series

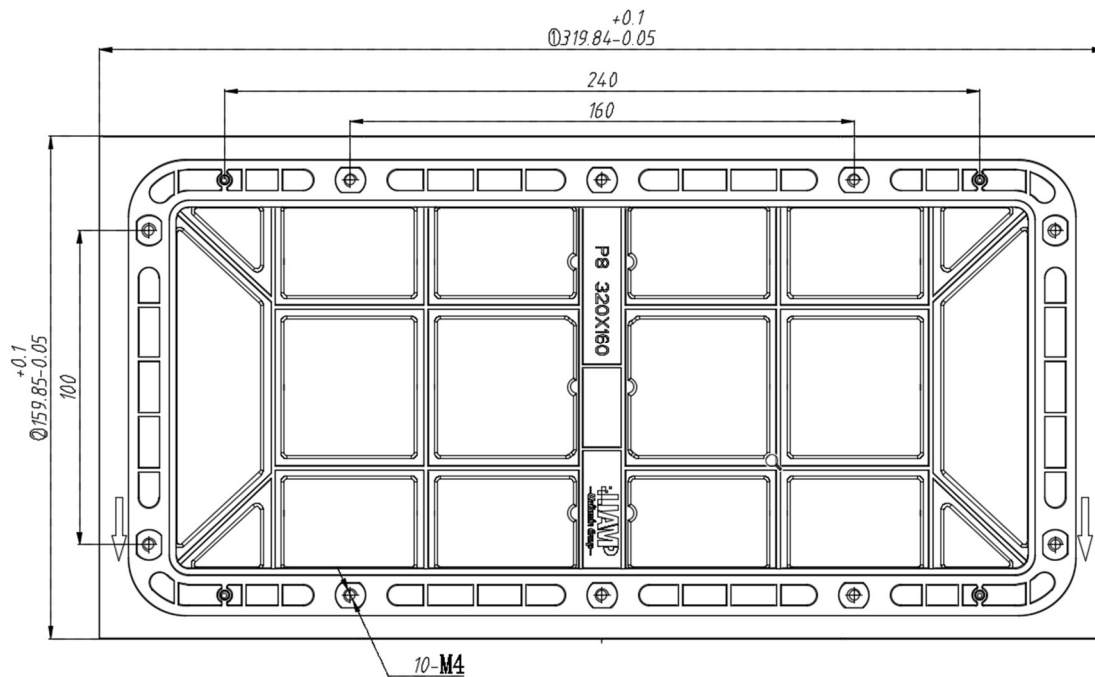

Wiring Diagram of Data and Power

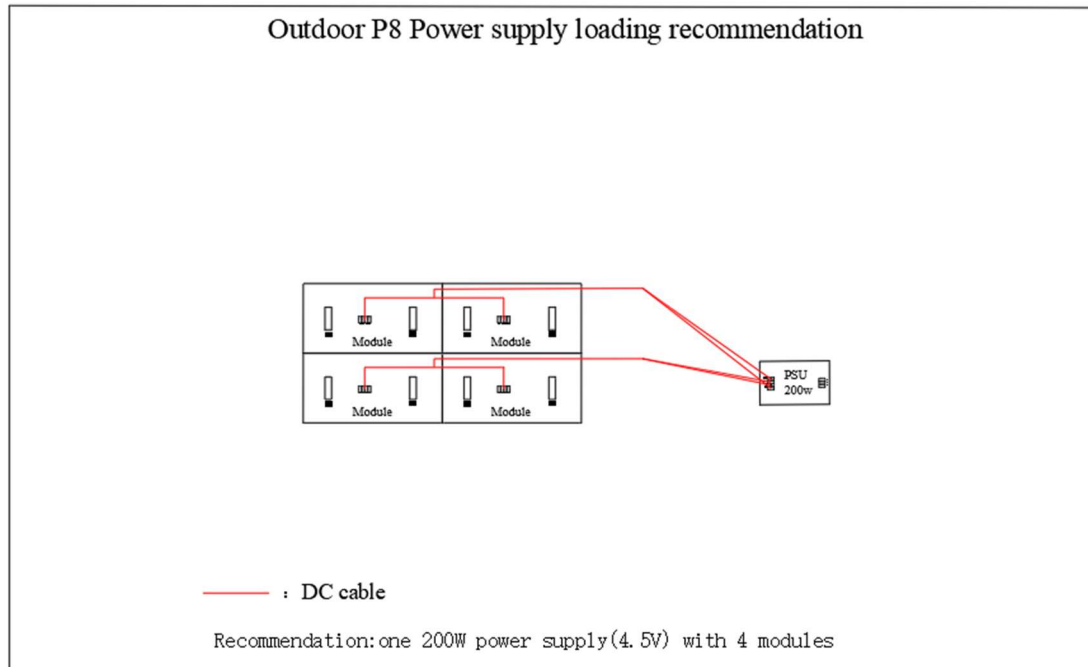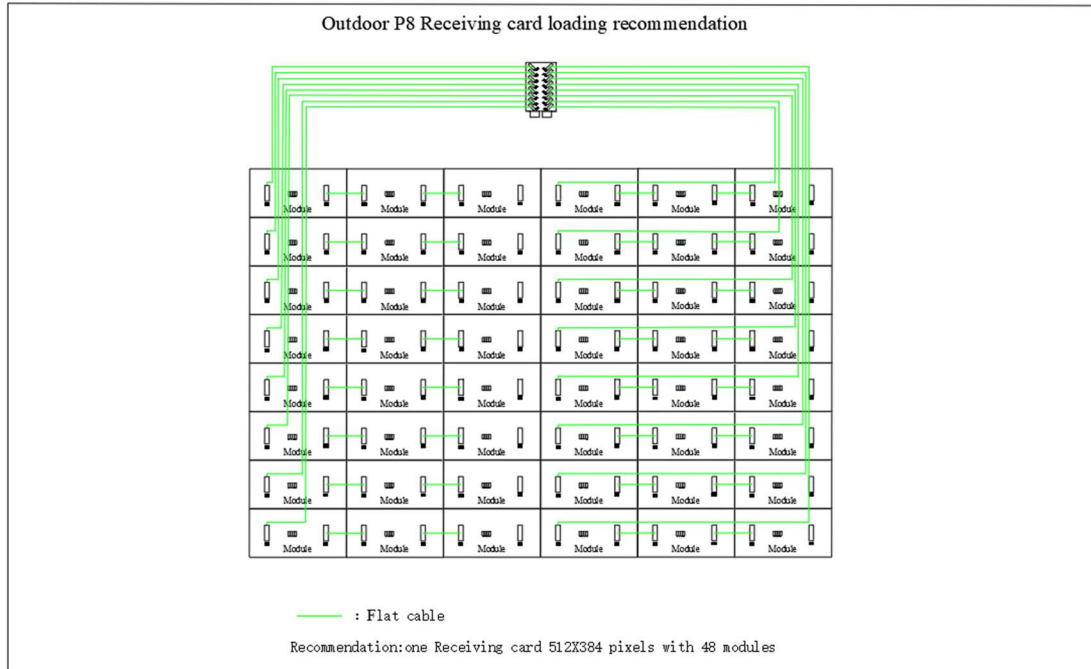

Remark:1. The recommended diagrams are for reference only.

2.The recommended cabinet size is 960X960 mm.

Parameter of Outdoor P8 Series

| | Parameter Name | Product Parameter |
|-------------|--|--|
| Module | LED Type | SMD2727 |
| | Pixel Pitch | 8mm |
| | Module Resolution (W×H) | 40X20=800 Pixels |
| | HUB | HUB75 |
| | Module Dimension | 320mm×160mm×18.5mm |
| | Module Weight | 0.48±0.02kg |
| Optical | Single-dot Brightness Calibration | Support |
| | White Balance Brightness | 4000 CD/m ² |
| | Standard Color Temperature | 6500K (1000K ~ 9500K Adjustable) |
| | Beam Angle (Hor/Ver°) | 140°/140° |
| | Contrast Ratio | 3000 : 1 |
| Electronic | Input Power <Max> | 879W/m ² |
| | Input Power <Typical> | 293W/m ² |
| | Power Supply Input Voltage | AC90 ~ 132V/ AC186 ~ 264V, Frequency 47~63 (Hz) |
| Performance | Frame Changing Frequency | 60Hz |
| | Drive Mode | Constant Current Drive / 5 Scan |
| | Refresh Rate | 1920Hz |
| | Processing Depth | 12~14 Bit |
| | Video Support | 2K HD, 4K UHD |
| Environment | Life Typical Value (HRS) | 50000H |
| | Working Temperature/ Humidity Range (°C/RH) | -20°C~50°C / 10%~65%RH (No Condensation) |
| | Storage Temperature / Humidity Range (°C/RH) | -10°C~30°C / 10%~60%RH (No Condensation) |

- Remark: 1. The above parameters are typical or recommended
 2. Product parameters or configuration adjustments without notice
 3. Customized products, please confirm the parameters with our company