





# Product Specification

Indoor P1. 839



## Product Picture of Indoor P1.839 Series

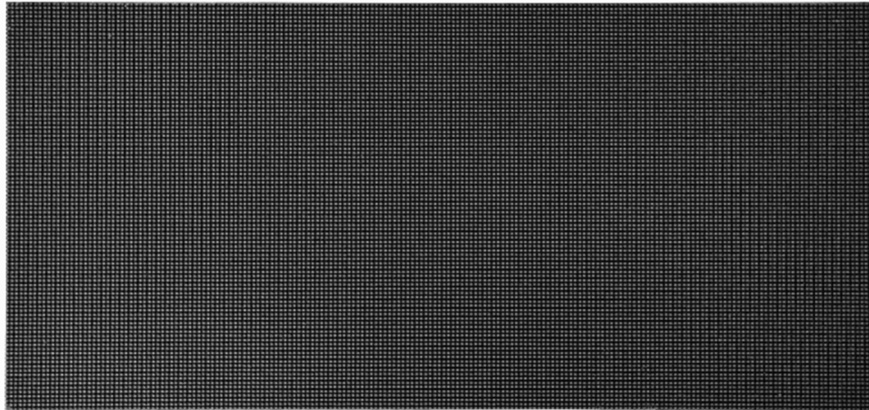

## Hole Position of Indoor P1.839 Series

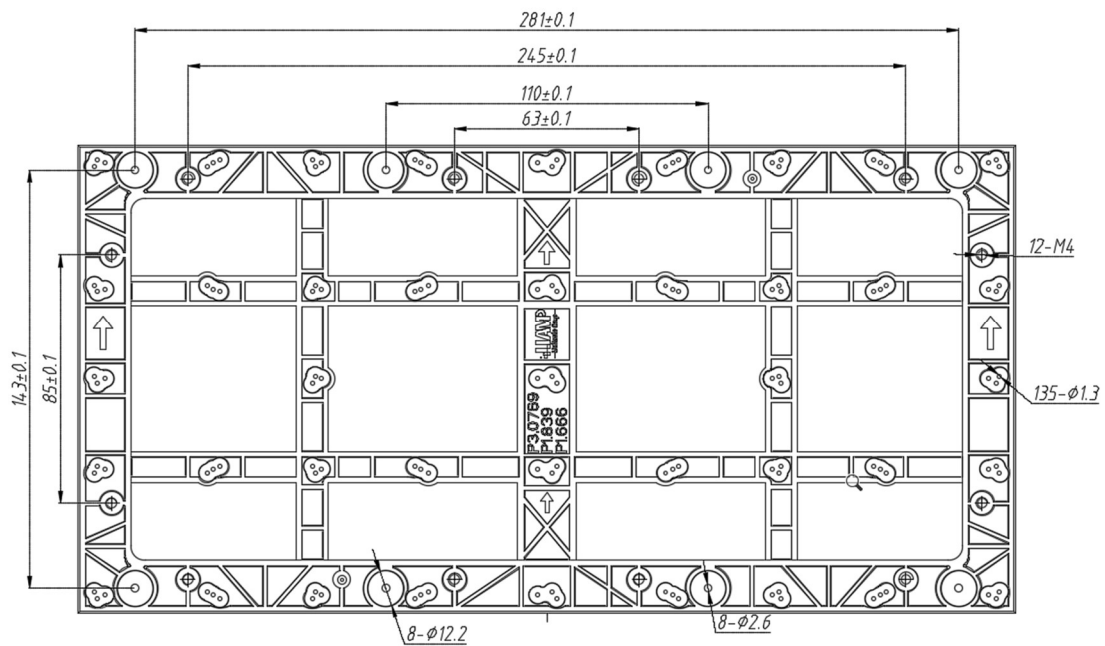

## Wiring Diagram of Data and Power

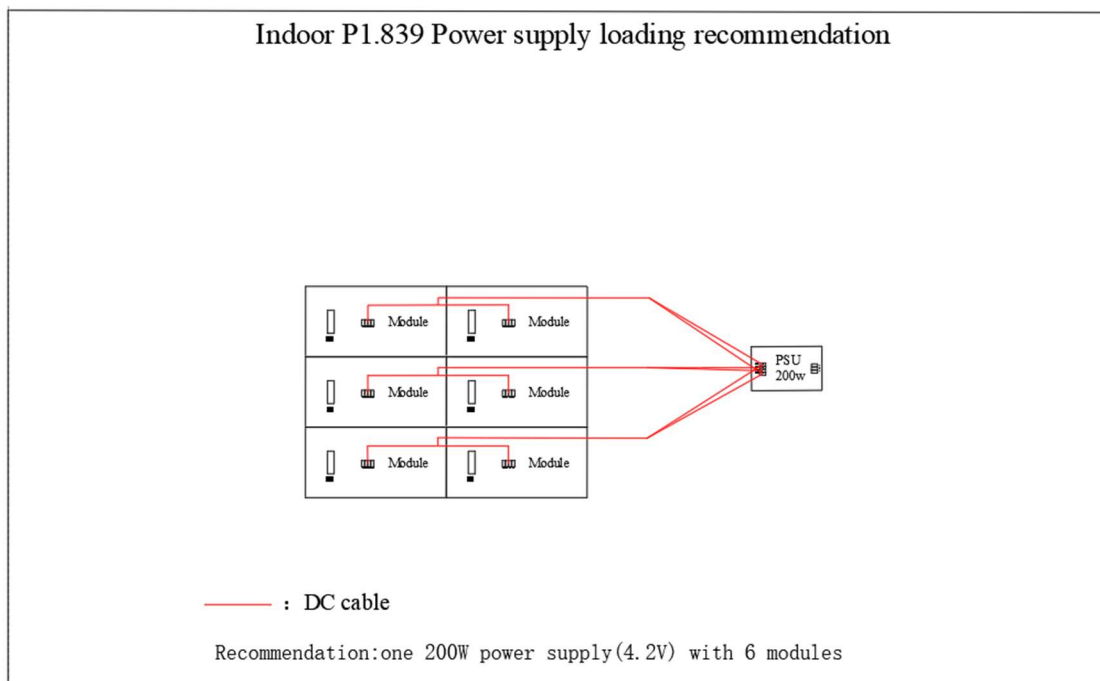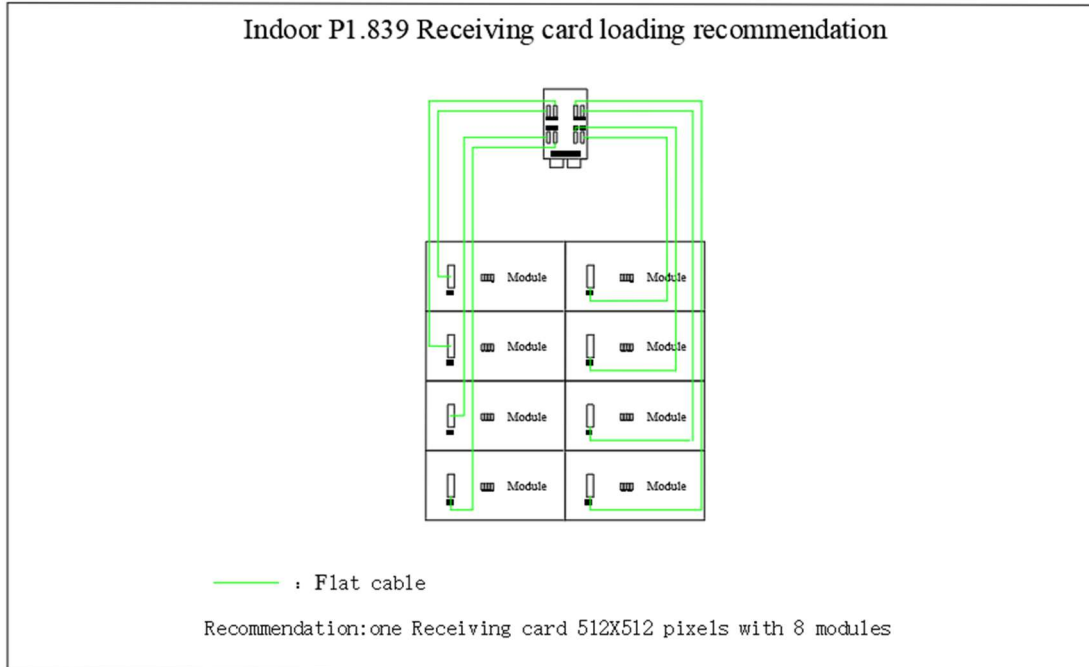

Remark:1. The recommended diagrams are for reference only.

2.The recommended cabinet size is 640X480 mm.

## Parameter of Indoor P1.839 Series

	Parameter Name	Product Parameter
Module	LED Type	SMD1515
	Pixel Pitch	1.839mm
	Module Resolution (W×H)	174×87=15138 Pixels
	HUB	HUB320
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.46±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	500 CD/m <sup>2</sup>
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable )
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
Electronic	Input Power <Max>	488W/m <sup>2</sup>
	Input Power <Typical>	163W/m <sup>2</sup>
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47~63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Drive Mode	Constant Current Drive / 58 Scan
	Refresh Rate	3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	50000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%~60%RH (No Condensation)

- Remark: 1. The above parameters are typical or recommended  
 2. Product parameters or configuration adjustments without notice  
 3. Customized products, please confirm the parameters with our company